


## TM-Chain Hoist TWN 1000

**with Overload Protection**  
Capacities 1/2 ton to 5 ton

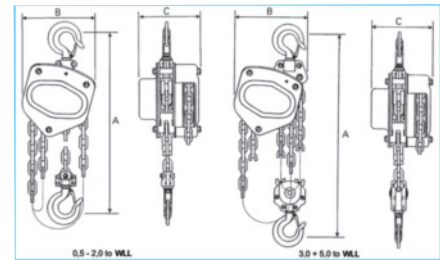


Safe Working Load	500 kg	1.0 to	2.0 to	3.0 to	5.0 to
Lift 10 ft (approx. 3.05 m)	F063511	F063611	F063711	F063811	F063911
Lift 15 ft (approx. 4.60 m)	F063512	F063612	F063712	F063812	F063912
Lift 20 ft (approx. 6.10 m)	F063513	F063613	F063713	F063813	F063913
Lift 30 ft (approx. 9.10 m)	F063514	F063614	F063714	F063814	F063914
Lift 40 ft (approx. 12.2 m)	F063515	F063615	F063715	F063815	F063915
Strands of chain	1	1	1	2	2
Effort to lift W.L.L. [lbs.] - 10 ft.	22	66	77	60	90
Net weight [lbs.]	22	26	48	70	101
Loadchain Diameter [mm]	6	6	8	8	10
Headroom (A) [inch]	10.64	12.49	16.31	18.32	25.06
Width (B) [inch]	5	6.23	7.37	8.27	9.97
Depth (C) [inch]	5.16	5.52	6.34	6.34	6.34
Hook opening (upper)	1.4	1.7	1.8	2.1	2.4
Hook opening (lower)	1.4	1.7	1.8	2.1	2.4

\* Special lifts upon request!

## TM-Lever Hoist TWN 1001

**with Overload Protection<sup>1</sup>**  
Capacities 1/4 ton to 6 ton

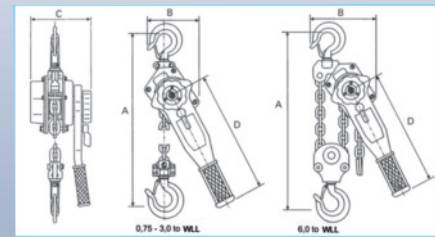

Safe Working Load / Tensioning Force	250 kg	750 kg	1.5 to	3.0 to	6.0 to
Lift 5 ft (approx. 1.5 m)	F061901	F062411	F062511	F062611	F062711
Lift 10 ft (approx. 3.05 m)	F061902	F062412	F062512	F062612	F062712
Lift 15 ft (approx. 4.60 m)	F061903	F062413	F062513	F062613	F062713
Lift 20 ft (approx. 6.10 m)	F061904	F062414	F062514	F062614	F062714
Strands of chain	1	1	1	1	2
Effort to lift W.L.L. [lbs.] - 5 ft.	4	30	48	70	75
Net weight [lbs.]	4	15	24	46	68
Loadchain Diameter [mm]	4	6	8	10	10
Length of lever handle (D)	6.3	11	16.1	16.1	16.1
Headroom (A) [inch]	9	12.8	15	18.9	24.4
Width (B) [inch]	3.3	5.4	6.3	7.1	9.3
Depth (C) [inch]	3.6	5.8	6.8	7.9	7.9
Hook opening (upper)	1.0	1.7	1.8	2.1	2.4
Hook opening (lower)	1	1.7	1.8	2.1	2.4

<sup>1</sup> except TM-LB 250 kg

\* Special lifts upon request!